


### Extra flexible, non-toxic tubing

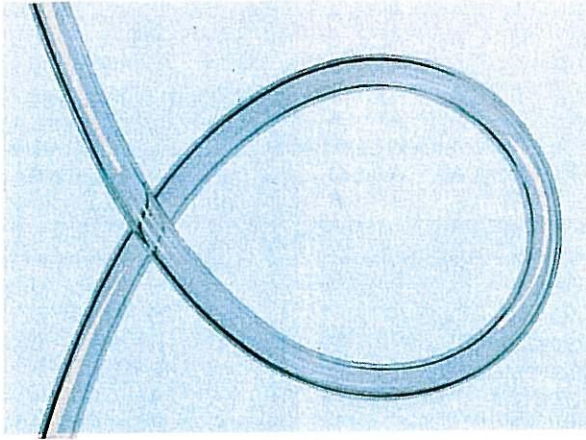

#### SIZE RANGE:

1/4" O.D. to 1/2" O.D.

#### MATERIAL:

- Ethylene Vinyl Acetate

#### MAXIMUM WORKING PRESSURE:

65 psi

#### CONFORMANCES:

FDA: Fabricated from material that complies with Food and Drug Administration requirement for handling of foods and beverages. Section 121.2570.

#### PHYSICAL PROPERTIES:\*

Tensile Strength:	3400 psi
Elongation %:	640
Water Absorption %:	.04
Hardness:	A-95
Specific Gravity:	.93

\*Typical data shown obtained from facts on tubing raw material under A.S.T.M. procedure.

#### CHARACTERISTICS

- Extremely flexible—even at low temperatures.
- Milky white translucent color permits visual inspection of colored fluids.
- Smooth bore is non-sticking and easily flushed clean.
- Operating temperature range -65° to 165°F.
- Excellent chemical resistance.
- Non-toxic, tasteless, odorless.

#### BURST PRESSURE/TEMPERATURE RATING

Temp.	75°F	100°F	125°F	140°F
44-EVA	265 psi	160 psi	100 psi	70 psi
66-EVA	210 psi	110 psi	85 psi	60 psi
88-EVA	160 psi	90 psi	70 psi	40 psi

#### SPECIFY CATALOG NUMBER AND QUANTITY WHEN ORDERING.

Catalog Number	Tube O.D., In.	Color	Coil Length	Tube Wall Thickness, In.	Burst Pressure psi	Minimum Bend Radius, In.	Weight (Lbs. Per 100 Ft.)
44-EVA	1/4	Clear	250 Ft.	.040	265	1/2	1.2
66-EVA	3/8	Clear	100 Ft.	.062	210	1	2.5
88-EVA	1/2	Clear	75 Ft.	.062	160	2	3.5